


M230i-NS

Pallet labeling system capable of applying labels to front and side panels or side and rear panels in motion or stationary. Available in 4" (M230i-NS100) or 6" (M230i-NS150) print widths.

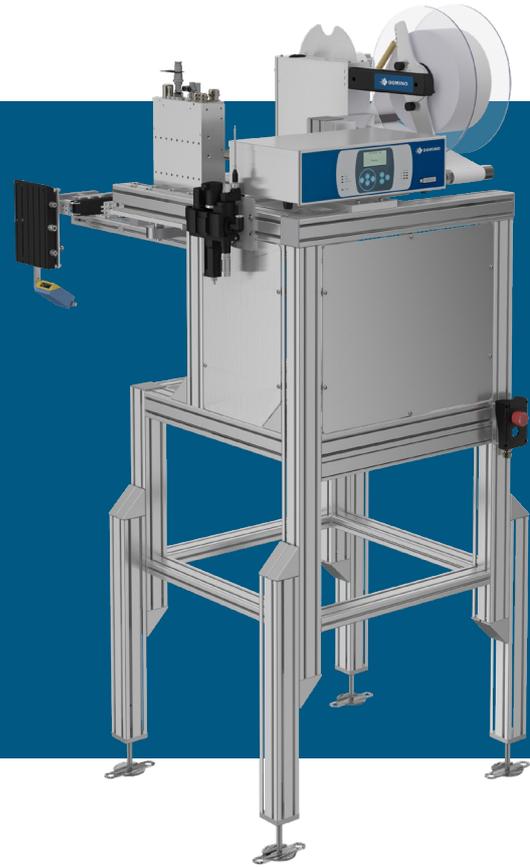

Facts & Features

- ◆ Labels one or two panels on pallets in motion or stationary
- ◆ Adjustable height stand included
- ◆ Up to 15.7" stroke distance to front or back label
- ◆ Up to 10.2" stroke distance to side label
- ◆ Label apply height from floor to upper edge of label: 43-52" (+/- 2" feet adjustment)
- ◆ Easy to clean magnetic mounted thermal print head
- ◆ Blow assisted label application to ensure label attachment
- ◆ 10 discrete Inputs and 10 discrete outputs to connect to PLC for status
- ◆ Optional integrated scanner to ensure barcode readability
- ◆ 600 m ribbon and label roll capacity
- ◆ Easy to service removable panel
- ◆ Machine stop included
- ◆ 12 dots/mm (300dpi) resolution
- ◆ Low media detection system

AVAILABLE MODELS

M230i-NS100-c260/400-110x110
M230i-NS100-c260/400-110x150
M230i-NS150-c260/400-150x110
M230i-NS150-c260/400-150x210

CONFIGURATION OPTIONS

Printer size	4" (NS100) or 6" (NS150)
Orientation	Left or Right
Scanner	Datalogic (DS)
Pad sizes 4"	4"x4" 4"x6" (portrait)
Pad size 6"	6"x4" (landscape) 6"x8" (portrait)
Machine stop	Included

POSSIBLE LABEL POSITIONS

